


Description: AUTOMATIC MULTIPORT VALVE

Multiport valve for AstralPool filters, usually used in a swimming pool to choose different functions of the filtration system: filtration, emptying, closing, back-washing, recirculation and rinsing.


Maximum working pressure: 3,5 bar

Material: ABS - **Distributor:** PPO - **Gaskets:** EPDM

MODEL	SYSTEM VRAC BASIC III - AUTOMATIC w/analog pressure sensor
ASSEMBLY	Side mount / Installation couplings included, but not assembled (o-rings for connection to filter included)
POSITION	P3
STANDARD	BSP threads
SPECIAL	

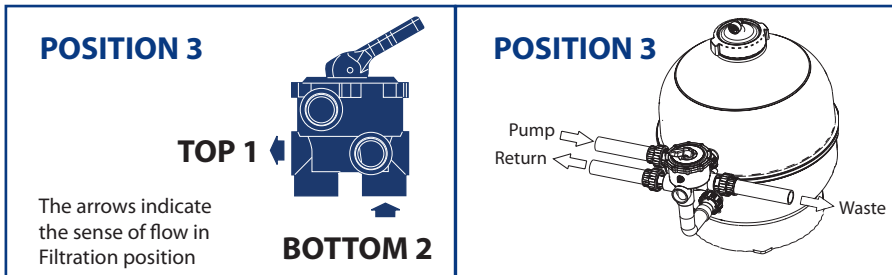



DIMENSIONS

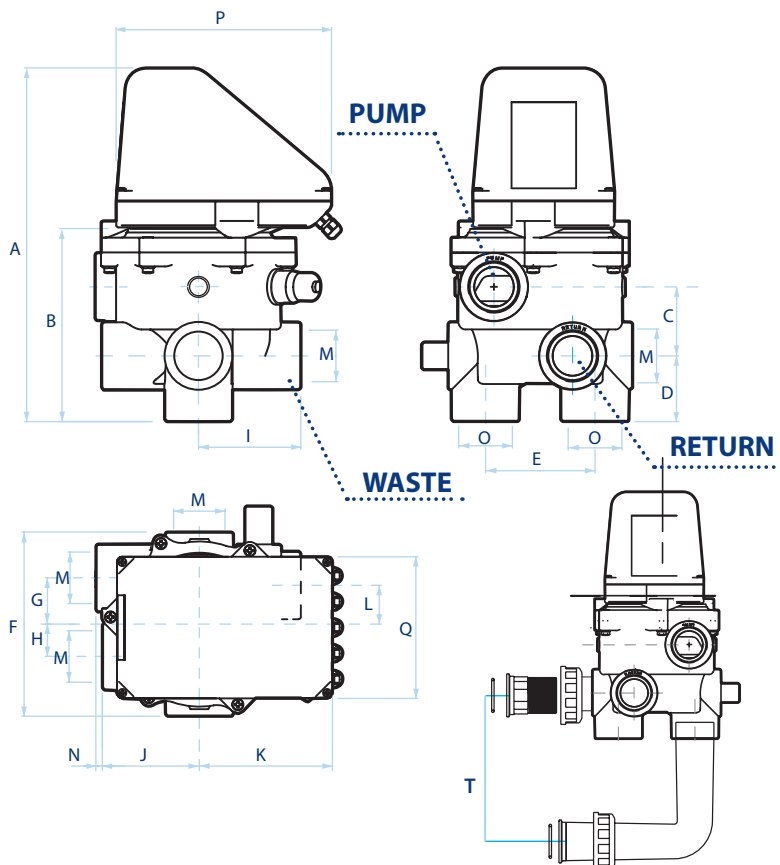



	PUMP	RETURN	WASTE	TOP 1	BOTTOM 2
1 1/2"	1 1/2" BSP	1 1/2" BSP	1 1/2" BSP	1 1/2" BSP	Ø50 mm
2"	2" BSP	2" BSP	2" BSP	2" BSP	Ø63 mm

PRESSURE LOSS

Valve 1 1/2"
Válvula 1 1/2"

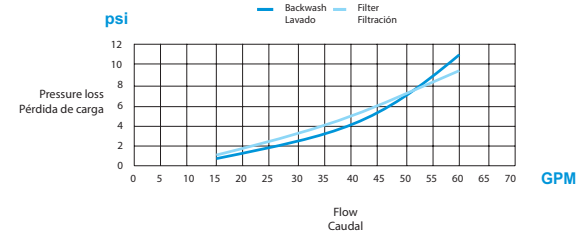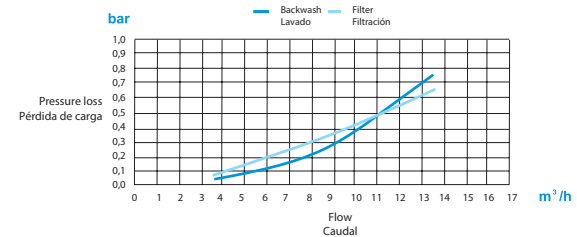

Valve 2"
Válvula 2"

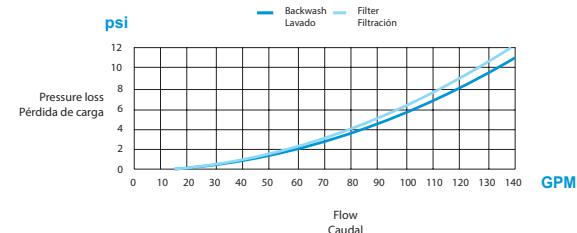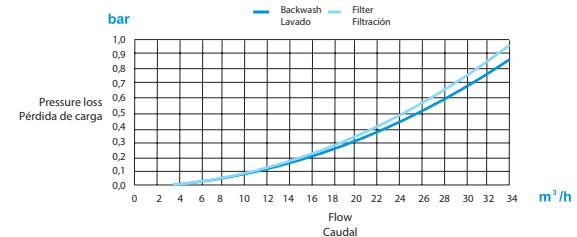

CODE	SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
72433	1 1/2"	330	180	64	61	101,5	172	43	30	95	90	124	31	1 1/2"	6	50	200	132	96	211	125
72434	2"	365	211	76	62,5	127	237	42	31,5	115,5	105,5	125	31,5	2"	5	63	200	132	96	247	230

- Materials:**
- Valve body: ABS.
 - Internal distributor: PPO.
 - Spring: AISI-302 coated stainless steel. Screws: AISI-316 stainless steel.

Technical characteristics:

- Maximum working pressure: 350 kPa (3.5 bar).
- Maximum service life: 5,000 washing and rinsing programmes.
- Temperature range: 5 - 35 °C.
- Degree of protection of the electronic module: IP-65.
- Maximum power = 35 W.
- Power supply: 115 - 230 VAC (50-60 Hz).
- Maximum expected height use of 2,000 m above sea level.
- Pressure switch range: from 30 to 200 kPa (0,3 - 2 bar / 4.2 – 28.4 psi),
- Pressure switch factory settings: operating pressure of 200 kPa (2 bar) (29 psi)


Connections:

Connection of the TOP, RETURN and WASTE openings through BSP female threads. In the case of lateral mounting, the BOTTOM opening of the body is provided for bonding using glue. The connection kit to a side filter with a 270mm (2") height is included.

Control:

Includes an integrated programmable keypad which permits access to the system in order to perform the following operations:

- **Filtration.** Starts up when it receives the instruction from the timer installed in the control panel or any external programmed instruction.
 - **Backwash.** Starts up manually (button) or automatically on receiving a signal from the pressure switch or with the time selected in the keypad. The pressure switch determines the saturation pressure of the filter and therefore when it is necessary to carry out a washing and rinsing process of the filter. A new specific regulation of the pressure switch should be carried out for each installation so that the operating system to wash the filter is correct. If the pressure exceeds the pre-established limit, the valve will automatically change position to start a washing and rinsing cycle. This cycle can also be automatically time controlled, after 24 hours or 7 days from when the last wash was carried out, as long as the valve is connected to the electricity.
 - **Rinse.** Begins automatically after each backwash cycle.
 - **Circulation.** Push-button to activate this function.
 - **Close.** Push-button to isolate the pump inlet to the outlets.
 - **Drainage.** Push-button operated, which positions the valve. This must be confirmed via the control box. This element prevent accidental emptying of pool.
 - **Backwash.** push button and informative LED.
- It includes **MODBUS** communication protocol that allows its operation and supervision.

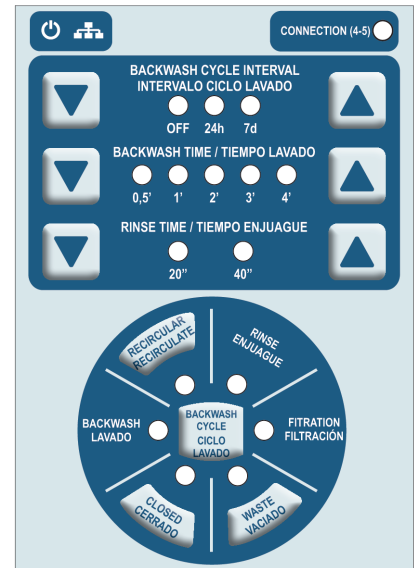

New analog pressure sensor

- Easy program of the pressure set point for backwashing - Pressing a button.
- Avoid corrosion - No metallic elements.
- Friendly set up Fluidra Connect Box - System VRAC Basic III:
 - Information of the current pressure value.
 - Backwash pressure set-point.
 - Real time information of the filtration system behaviour.