

CHECK VALVE - CLEAR SERIES





PRODUCT DESCRIPTION

Transparent non-return valve for swimming pools.


Maximum working pressure: 3.5 bar (50 psi) at a working temperature between 10 and 30°C.

The product allows water flow only in the working direction, blocking flow in the opposite direction. In addition to the non-return function, the transparent body and cover provide the additional function of a liquid sight glass.

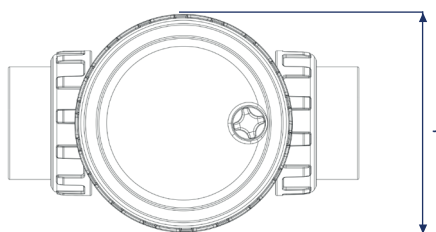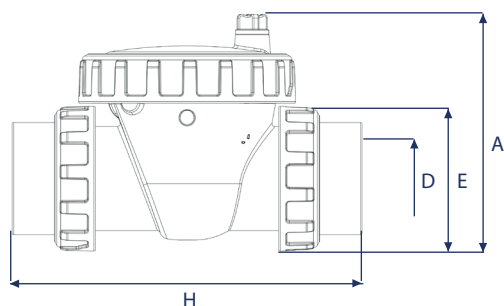


	D50	D63
D	50	63
E	80	95
H	198	231
L	28	35
A	140	156
J	126	143

Pressure loss graph

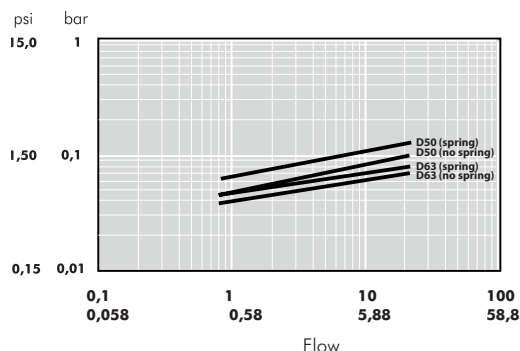

Pressure / temperature graph

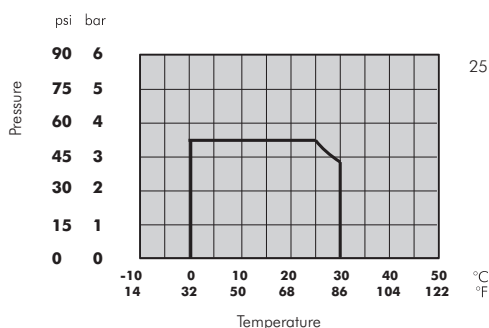

25 years / water flow

Necessary flow to open the valve with spring:



D50 - 0,7 m³/h
D63 - 0,8 m³/h

CODES	DESCRIPTION
76782	Check valve Clear Series D50 without spring
76783	Check valve Clear Series D63 without spring
76740	Check valve Clear Series D50 with spring
76741	Check valve Clear Series D63 with spring