

MODEL: Modular grating


Description: Modular grating for curves

Material: PP

Protection UV: YES

Reversibility: Possible assembly in both sides

Units per meter: 48

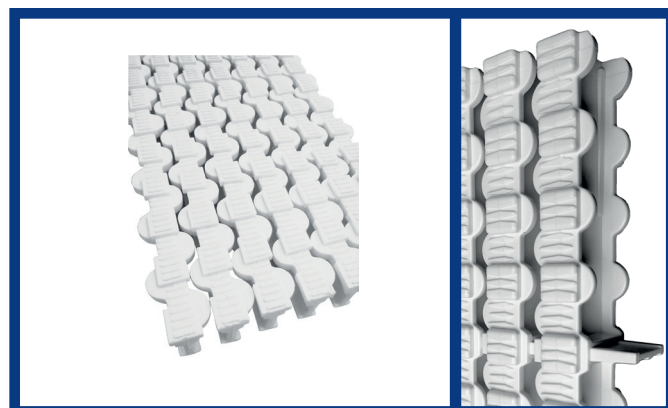




Add to code	RAL	SAMPLE
-37258	7012	
CL90	1015	
CL109	8002	
CL60	5003	
CL108	5024	

* More colors on request


DIMENSIONS

CODE	L	L1	h	R	r	Uts. / m.	Drain flow
52539	200 mm	195 mm	35 mm	645 mm	450 mm	49	70,43 m³/h
52540	250 mm	245 mm	35 mm	825 mm	580 mm	49	89,99 m³/h
52541	300 mm	295 mm	35 mm	1055 mm	760 mm	49	109,83 m³/h
52542	340 mm	335 mm	35 mm	1155 mm	820 mm	48	121,65 m³/h

* Caudal de drenaje correspondiente a 1 m lineal con una velocidad de fluido de 0,4 m/s.

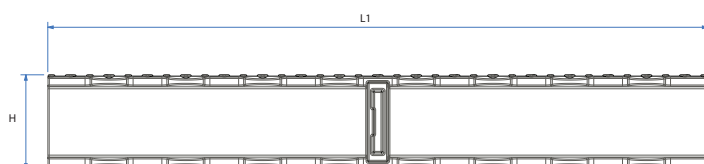

CHANNEL WIDTH AND HEIGHT

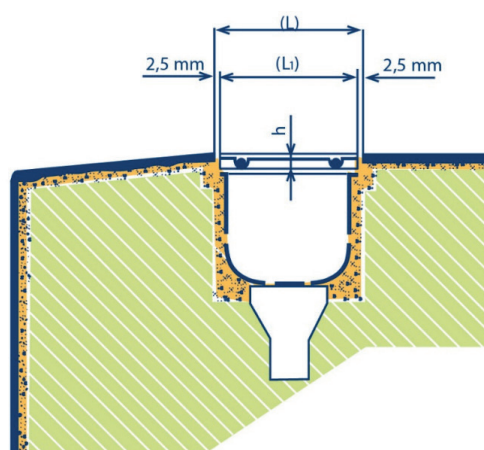

REGULATIONS

REGULATION	DESCRIPTION
EN 13451-1 - Appendix E	Slipping resistance test - maximum tilt angle as European test with bare foot sliding
UNE-ENV 12633	Class 3 required for pool according to the CTE for slipping test resistance