


MODEL: Modular grating

Description: Modular grating for curves

Material: PP

Protection UV: YES

Reversibility: One side assembly



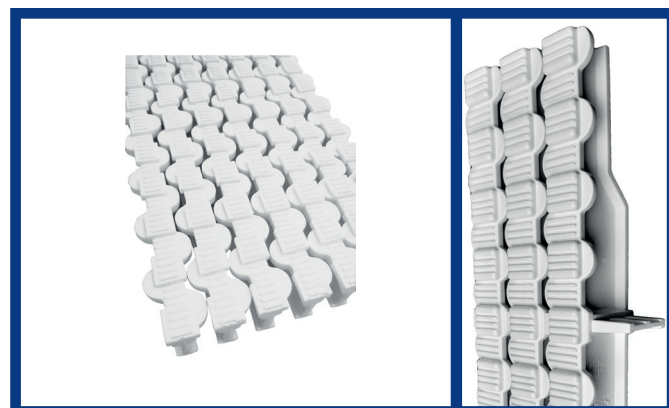


Add to code	RAL	SAMPLE
-37258	7012	
CL90	1015	
CL109	8002	
CL60	5003	
CL108	5024	


* More colors on request

DIMENSIONS

CODE	L	L1	B	h	C	R	r	Uts. / m.	Drain flow
52535	200 mm	195 mm	35 mm	22 mm	40 mm	645 mm	450 mm	49	70,43 m ³ /h
52536	250 mm	245 mm	35 mm	22 mm	40 mm	825 mm	580 mm	49	89,99 m ³ /h
52537	300 mm	295 mm	35 mm	22 mm	40 mm	1055 mm	760 mm	49	109,83 m ³ /h
52538	340 mm	335 mm	35 mm	22 mm	40 mm	1155 mm	820 mm	48	121,65 m ³ /h

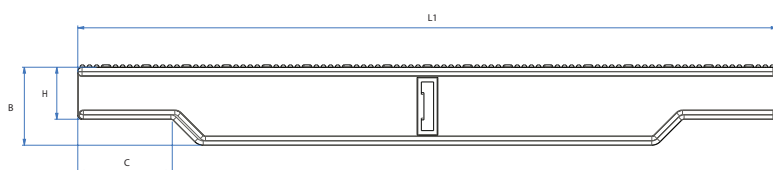

CHANNEL WIDTH AND HEIGHT

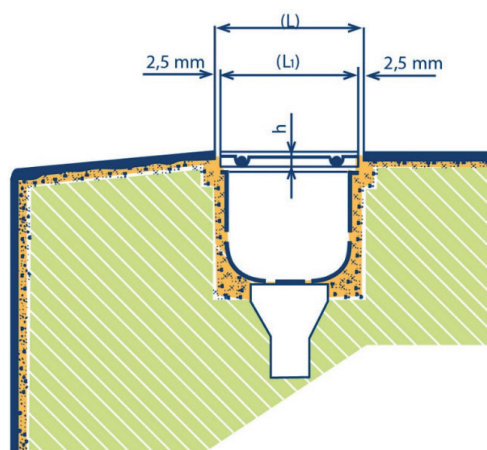

* Caudal de drenaje correspondiente a 1 m lineal con una velocidad de fluido de 0,4 m/s.

REGULATIONS

REGULATION	DESCRIPTION
EN 13451-1 - Appendix E	Slipping resistance test - maximum tilt angle as European test with bare foot sliding
UNE-ENV 12633	Class 3 required for pool according to the CTE for slipping test resistance